

偏转扇形喷嘴 - K 系列

适用于



液体、蒸汽和空气的喷射

设计特点

- 喷雾颗粒细小均匀
- 可产生角度宽广，冲击力适中的扇形
- 喷嘴具有圆形喷孔，大而畅通的流道，将阻塞现象减少至最低点
- 进水方向与出水方向成 75° 偏转
- 该喷嘴适合柔和漂洗，不适合强力冲洗
- 同时适用于液体、蒸汽和空气的喷射

一般应用


- 消泡
- 清洗、漂洗
- 冷却
- 水帘
- 防火



K



外形尺寸

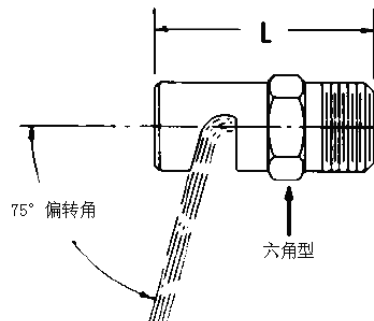

喷嘴型号	六角宽度 (毫米)	喷嘴长度 (毫米)	不锈钢喷嘴 重量 (千克)
1/8K	14.3	31.0	0.03
1/4K	14.3	34.0	0.03
3/8K	17.5	44.5	0.06
1/2K	22.2	51.0	0.11
3/4K	38.1	65.0	0.40
1K	47.6	92.0	0.91

性能参数

喷射空气或蒸汽

流量 代码	喷 孔 口 径 (mm)	空气喷射量 (L/min)				蒸汽喷射量 (Kg/Hr)				距离喷嘴 口150mm处 喷雾宽度 (mm)	
		0.7 bar	1.5 bar	3 bar	3.5 bar	0.7 bar	1.5 bar	3 bar	3.5 bar	0.7 bar	3.5 bar
0.50	0.61	4.5	6.4	10.5	11.6	0.16	0.23	0.37	0.41	51	127
0.75	0.71	6.2	9.1	14.7	16.7	0.23	0.33	0.53	0.60	64	140
1	0.84	9.6	13.7	22	25	0.34	0.49	0.80	0.90	76	152
1.5	1.04	15.3	22	36	40	0.54	0.78	1.3	1.5	89	165
2	1.17	19.3	28	45	51	0.68	1.0	1.6	1.8	102	190
2.5	1.32	27	37	60	71	0.95	1.3	2.1	2.5	102	190
3	1.45	31	47	77	85	1.1	1.7	2.7	3.0	127	203
4	1.65	40	57	85	108	1.4	2.0	3.1	3.9	127	228
5	1.85	54	76	124	139	1.9	2.7	4.5	5.0	152	267
7.5	2.31	79	117	189	210	2.9	4.2	6.8	7.6	152	267
10	2.64	110	159	255	290	3.9	5.7	9.2	10.4	178	279
15	3.28	181	260	420	475	6.5	9.3	15.0	17.1	178	305
20	3.76	225	325	520	590	8.0	11.6	18.8	21	216	368
30	4.57	320	465	760	850	11.6	16.8	27	30	216	394

性能参数

喷射水

连接尺寸 (英寸)						流量 代码	喷嘴 口径 (mm)	流 量 L/min @压力bar										喷射角度		
1/8	1/4	3/8	1/2	3/4	1			0.2 bar	0.3 bar	0.5 bar	0.7 bar	1 bar	1.5 bar	2 bar	3 bar	4 bar		0.5 bar	1.5 bar	4 bar
●						0.25	0.41					0.11	0.14	0.16	0.20	0.23		83°	117°	
●						0.50	0.61					0.23	0.28	0.32	0.39	0.46		89°	122°	
●						0.75	0.71				0.29	0.34	0.42	0.48	0.59	0.68		106°	125°	
●						1.0	0.84				0.38	0.46	0.56	0.64	0.79	0.91		109°	128°	
●						1.5	1.0			0.48	0.57	0.68	0.84	0.97	1.2	1.4		73°	108°	125°
●	●					2	1.2			0.64	0.76	0.91	1.1	1.3	1.6	1.8		83°	113°	129°
●	●					2.5	1.3		0.62	0.81	0.95	1.1	1.4	1.6	2.0	2.3		98°	122°	133°
●	●					3	1.4		0.75	0.97	1.1	1.4	1.7	1.9	2.4	2.7		86°	112°	126°
●	●					4	1.7		1.0	1.3	1.5	1.8	2.2	2.6	3.2	3.6		97°	123°	132°
●	●					5	1.9	1.0	1.2	1.6	1.9	2.3	2.8	3.2	3.9	4.6		114°	128°	142°
●	●					7.5	2.3	1.5	1.9	2.4	2.9	3.4	4.2	4.8	5.9	6.8		101°	119°	134°
●	●					10	2.6	2.0	2.5	3.2	3.8	4.6	5.6	6.4	7.9	9.1		115°	133°	145°
●	●					12	2.9	2.4	3.0	3.9	4.6	5.5	6.7	7.7	9.5	10.9		128°	139°	153°
●	●					15	3.3	3.1	3.7	4.8	5.7	6.8	8.4	9.7	11.8	13.7		98°	113°	123°
●	●					18	3.6	3.7	4.5	5.8	6.9	8.2	10.0	11.6	14.2	16.4		106°	120°	131°
●	●					20	3.8	4.1	5.0	6.4	7.6	9.1	11.2	12.9	15.8	18.2		110°	122°	133°
●	●					22	4.0	4.5	5.5	7.1	8.4	10.0	12.3	14.2	17.4	20		113°	125°	136°
●	●					24	4.1	4.9	6.0	7.7	9.2	10.9	13.4	15.5	18.9	22		115°	131°	144°
●	●					27	4.4	5.5	6.7	8.7	10.3	12.3	15.1	17.4	21	25		119°	135°	148°
●	●	●				30	4.6	6.1	7.5	9.7	11.4	13.7	16.7	19.3	24	27		100°	110°	121°
●	●	●	●			35	5.0	7.1	8.7	11.3	13.3	16.0	19.5	23	28	32		105°	118°	128°
●	●	●	●			40	5.3	8.2	10.0	12.9	15.3	18.2	22	26	32	36		111°	126°	136°
●	●	●	●			45	5.6	9.2	11.2	14.5	17.2	21	25	29	36	41		115°	130°	140°
●	●	●	●			50	6.0	10.2	12.5	16.1	19.1	23	28	32	39	46		117°	131°	140°
●	●	●	●			60	6.5	12.2	15.0	19.3	23	27	33	39	47	55		120°	134°	142°
●	●	●	●			70	7.1	14.3	17.5	23	27	32	39	45	55	64		123°	137°	146°
●	●	●	●	●		80	7.5	16.3	20	26	31	36	45	52	63	73		127°	138°	149°
●	●	●	●	●		90	8.0	18.3	22	29	34	41	50	59	71	82		120°	133°	140°
●	●	●	●	●		100	8.4	20	25	32	38	46	56	64	79	91		123°	136°	145°
●	●	●	●	●		110	8.8	22	27	35	42	50	60	71	87	100		125°	138°	148°
●	●	●	●	●		120	9.3	24	30	39	46	55	67	77	95	109		129°	143°	150°
●	●	●	●	●		140	10.3	29	35	45	53	64	78	90	111	128		118°	127°	135°
●	●	●	●	●		160	11.1	33	40	52	61	73	89	103	126	146		121°	130°	137°
●	●	●	●	●		180	11.5	37	45	58	69	82	100	116	142	164		124°	133°	139°
●	●	●	●	●		210	12.3	43	52	68	80	96	117	135	166	191		128°	139°	145°
●	●	●	●	●	●	300	14.7	61	75	97	114	137	167	193	235	275		110°	128°	135°
●	●	●	●	●	●	450	17.9	92	112	145	172	205	250	290	355	410		118°	132°	138°

注： 如无特殊说明，连接尺寸，一般均为标准英制螺牙（BSPT）。如果需要美制螺牙（NPT），请另外标注。如需非标喷嘴，请与我公司联系。

推荐附件

拼合孔连接器



可替代螺纹焊接底座，有防泄漏垫圈，详见 P94页

可调球接头



具有万向可调位置，方便控制喷嘴的喷射方向，详见 P93页

订购信息

1/4 K - SS 10

连接 喷嘴 材料 流量
尺寸 型号 代码 代码

材料代码：

SS : 303 不锈钢

316SS : 316 不锈钢

BRASS : 黄铜

PVC : 聚氯乙烯

TEF : 聚四氟乙烯